SAFES FOR HOTEL AND PRIVATE USE

MOTTURA

safeguarding your security

MADE IN ITALY

HOME SAFES PRODUCT CERTIFICATION

ACCREDIA

ICIM

Certificazione di Prodotto

Product Certification

Certificato N. / *Certificate No.* 053AE/3

MOTTURA Serrature di Sicurezza S.p.A.

Strada Antica di Francia, 34 – 10057 Sant'Ambrogio di Torino (TO)

CASSEFORTI PER USO PRIVATO

SECURE SAFE CABINETS

EN 14450:2018 - ICIM 0057CS

S2

ICIM S.p.A.

GRADE S2 CERTIFICATION FROM ICIM INSTITUTE IN ACCORDANCE WITH STANDARD UNI EN 14450

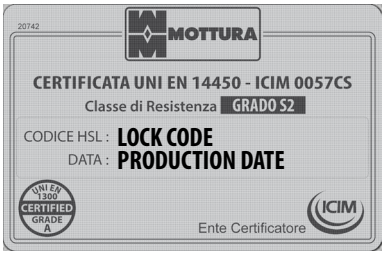

Personal Electronic
Lock with electronic combination system

Personal
Key locking

Personal
Key and mechanical combination locking

Personal
Mechanical combination locking

No Problem Electronic
Lock with electronic combination system

No Problem
Key and mechanical combination locking

Under
Key locking - Key and mechanical combination locking

FRAME EXTERNAL DIMENSIONS

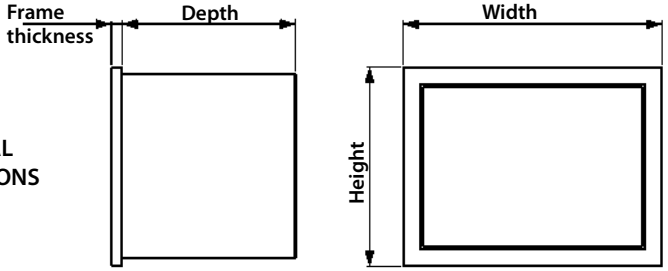



MOTTURA PATENT

CUPBOARD SAFES FOR HOTEL, RESORT, SHIPS

10

MOTTURA

safeguarding your security

MADE IN ITALY

AN EXCLUSIVE COLLECTION RENEWED IN THE ELECTRONIC VERSION

HoKey® is a line of safes specific for hotels, resorts and ships, but also suitable for domestic use at home. A leading-edge project that comes from an exclusive design, understood in the broadest sense but also rationalization in dimensions and overall volume with regard to the placing and use.

It is a collection that perfectly combines three fundamental demands:
- ease of installation
- the ability to blend the safe into its surroundings
- great ease of use.

The paint finish with cataphoresis treatment (optional) which ensures a high resistance to corrosion and is advisable for use in particularly difficult environment such as, for example, constant exposure to sea air. HoKey® safes do not require any masonry work: the back and base are supplied with holes for rapid fixing to walls, cupboards, furnishings and closets. Dowels not included.

Locking systems

HoKey® ® safes are available with four types of lock:
- Electronic with standard master code (fig. 1)
- Extractable europrofile cylinder (fig. 2)
- Double-bitted key (fig. 3).

The electronic safes features a new design keyboard with low energy consumption multilingual alphanumeric display. They are available in two different versions:

1. with emergency mechanical opening with europrofile cylinder (fig. 4).

All electronic safes have the possibility of opening via external power supply (alkaline battery, type PP3 9 volt) in case of power failure (fig. 5).





Optional

- Left hand opening (fig. 6) ONLY for HE8000 type.

10.HE8000

Locking with electronic combination and **emergency mechanical opening with europrofile cylinder** (half cylinder Champions® C10 type M length mm 31 - C10M310001)

- Pin code (6 digit min - 8 digit max) allows millions of combinations.
- Standard master code supplied.
- Keyboard with a new design with multilingual alphanumeric display.
- Low energy consumption.
- The door opens automatically once unlocked, thanks to the incorporated spring.
- With every new setting, the system cancels the previous code.
- Powered with 6 "AA" 1.5V alkaline batteries. In case of completely discharged batteries, possibility of opening via external battery (alkaline type PP3 9 Volt)
- Emergency mechanical opening with europrofile cylinder (included) near the keyboard.
- Shell and frame grey ral 7031.
- Door with instructions for use in four languages (Italian, English, French and Spanish).

The vertical format (Art. HE8100) allows to contain large objects such as document dossiers, personal computers, valuable equipment. Internal shelves with fixed position (welded).

Electronic

Art.	External frame dimensions in mm			Internal frame dimensions in mm			Door passage dim. in mm		Thickness mm		Weight Kg.	Bolts n°	
	height	width	**depth**	height	width	**depth**	height	width	Door	Shell			
10.HE8000	250	370	**280**	246	366	**233**	200	300	6	2	15,5	1	

10.HS6000

Locking with europrofile cylinder
- for HS6000 (half cylinder Champions® C10 type M, lenght mm 31 - C10M310001).

C10M310001

This model especially offers a double advantage: the comfort of the short key and the possibility of fixing the cylinder in the safe directly by the end user. The europrofile cylinder can be easily removed in case of need, pulling the pivot inside the door.

Lock with europrofile cylinder Champions® C10 (included)

Art.	External frame dimensions in mm			Internal frame dimensions in mm			Door passage dim. in mm		Thickness mm		Weight Kg.	Bolts n°	
	height	width	**depth**	height	width	**depth**	height	width	Door	Shell			
10.HS6000	175	270	**225**	170	265	**177**	109	170	3	2	6,6	2	

Lock with europrofile cylinder (not included)

Art.	External frame dimensions in mm			Internal frame dimensions in mm			Door passage dim. in mm		Thickness mm		Weight Kg.	Bolts n°	
	height	width	**depth**	height	width	**depth**	height	width	Door	Shell			
10.HS6010	175	270	**225**	170	265	**177**	109	170	3	2	6,5	2	

10.HS5800

10.HS5000

Lock with
double-bitted key.

The double-bitted key ensures simplicity and superlative reliability.
Two lower fixing points and two rear fixing points are provided. Ø15 mm holes for Ø12 mm wall plugs.

Lock with double-bitted key

Art.	External frame dimensions in mm			Internal frame dimensions in mm			Door passage dim. in mm		Thickness mm		Weight Kg.	Bolts n°	
	height	width	**depth**	height	width	**depth**	height	width	Door	Shell			
10.HS5000	175	270	**225**	170	265	**177**	109	190	3	2	6,5	2	
10.HS5500	250	370	**280**	246	366	**233**	200	300	6	2	14,7	2	
10.HS5800	495	375	**323**	491	371	**263**	390	250	6	2	26	3+2	

91.067 CF6

Spare core with **6 levers** for safes HoKey® HS5000 / 5500

91.067 CF7

Spare core with **7 levers** for safes HOKEY HS5600/5800

HOME SAFES

11

MOTTURA

safeguarding your security

MADE IN ITALY

PERSONAL ELECTRONIC - Lock with electronic combination system

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Keypad electronic combination - Motorised movement of MM shaped bolts. External manganese protection extended to protect front bolts (as shown in the photo). An internal LED light switches on automatically when the safe is open. Built-in model with electronic combination locking. Supplied with 1 internal shelf. Horizontal and vertical layout. Door thickness 10 mm; frame thickness 12 mm.





Electronic

Possibility of version with double code - add M to the article code

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dim. [mm]		Rear dimensions [mm]		Weight [Kg]	Locking bolts		
	height	width	**depth**	height	width	**depth**	height	width	height	width		horiz.	vert.	
11.3120	230	350	**200**	215	335	**145**	150	225	270	390	16,5	2	2	
11.3220	290	410	**200**	275	395	**145**	205	285	330	450	23	2	2	
11.3320	360	460	**200**	345	445	**145**	280	335	400	500	30,5	3	2	
11.3125	230	350	**250**	215	335	**195**	150	225	270	390	17,5	2	2	
11.3225	290	410	**250**	275	395	**195**	205	285	330	450	24,5	2	2	
11.3325	360	460	**250**	345	445	**195**	280	335	400	500	32,5	3	2	
11.3445	490	370	**250**	475	355	**205**	390	225	525	405	33,7	3	2	

NOTE

The small safes 113120/25 use flat vertical bolts not shaped bolt.

PERSONAL - With key and mechanical combination lock

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Built-in model with key + mechanical combination locking.
MM shaped bolts. External manganese protection extended to protect front bolts (as shown in the photo).
Horizontal (art. 11.2115 - 11.2330) and vertical (11.2420/25/40/45 - 11.2525/30) layout. Door thickness 10 mm; frame thickness 12 mm
For art. 11.2525 and 11.2530, door thickness 12 mm; frame thickness 15 mm;
Supplied with: 2 keys 40 mm stem art. 92297/5 - 1 internal shelf, height-adjustable for vertical versions 11.2525-11.2530.





Key and mechanical combination

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dim. [mm]		Rear dim. [mm]		Weight [Kg]	Locking bolts	
	height	width	**depth**	height	width	**depth**	height	width	height	width		horiz.	vert.
11.2115	230	350	**150**	215	335	**95**	150	225	270	390	16	2	2
11.2120	230	350	**200**	215	335	**145**	150	225	270	390	17	2	2
11.2220	290	410	**200**	275	395	**145**	205	285	330	450	23,5	2	2
11.2320	360	460	**200**	345	445	**145**	280	340	400	500	31	3	2
11.2420	430	295	**200**	415	280	**155**	335	155	470	330	25	3	2
11.2440	490	370	**200**	475	355	**155**	390	225	525	405	30	3	2
11.2125	230	350	**250**	215	335	**195**	150	225	270	390	18	2	2
11.2225	290	410	**250**	275	395	**195**	205	285	330	450	25	2	2
11.2325	360	460	**250**	345	445	**195**	280	340	400	500	33	3	2
11.2425	430	295	**250**	415	280	**205**	335	155	470	330	26	3	2
11.2445	490	370	**250**	475	355	**205**	390	225	525	405	32	3	2
11.2525	680	480	**250**	665	465	**195**	580	335	725	525	78	4	2
11.2230	290	410	**300**	275	395	**245**	205	285	330	450	26,5	2	2
11.2330	360	460	**300**	345	445	**245**	280	340	400	500	35	3	2
11.2530	680	480	**300**	665	465	**245**	580	335	725	525	79	4	2

NOTE
The small safes 11.2115/20/25 use flat vertical bolts not shaped bolt.

PERSONAL - With key

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Built-in model with key locking.
MM shaped bolts. External manganese protection extended to protect front bolts (as shown in the photo).
Horizontal layout. Door thickness 10 mm; frame thickness 12 mm
Supplied with: 2 keys 40 mm stem art. 92297/5 - 1 internal shelf.

Key

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dim. [mm]		Rear dimensions [mm]		Weight [Kg]	Locking bolts	
	height	width	**depth**	height	width	**depth**	height	width	height	width		horiz.	vert.
11.1120	230	350	**200**	215	335	**145**	150	225	270	390	16	2	2
11.1220	290	410	**200**	275	395	**145**	205	285	330	450	22,5	2	2
11.1320	360	460	**200**	345	445	**145**	280	340	400	500	30	3	2
11.1225	290	410	**250**	275	395	**195**	205	285	330	450	24	2	2

NOTE
The small safes 11.1120 use flat vertical bolts not shaped bolt.

PERSONAL - With mechanical combination lock

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Built-in model with 4-dial mechanical combination locking.
MM shaped bolts. External manganese protection extended to protect front bolts (as shown in the photo).
Horizontal and vertical layout. Door thickness 10 mm; frame thickness 12 mm
For art. 11.5530, door thickness 12 mm; frame thickness 15 mm; 5mm protruding knobs.
Supplied with 1 internal shelf



Mechanical combination

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dim. [mm]		Rear dimensions [mm]		Weight [Kg]	Locking bolts	
	height	width	**depth**	height	width	**depth**	height	width	height	width		horiz.	vert.
11.5115	230	350	**150**	215	335	**95**	150	225	270	390	16	2	2
11.5120	230	350	**200**	215	335	**145**	150	225	270	390	17	2	2
11.5220	290	410	**200**	275	395	**145**	205	285	330	450	23,5	2	2
11.5320	360	460	**200**	345	445	**145**	280	340	400	500	31	3	2
11.5125	230	350	**250**	215	335	**195**	150	225	270	390	18	2	2
11.5225	290	410	**250**	275	395	**195**	205	285	330	450	25	2	2
11.5325	360	460	**250**	345	445	**195**	280	340	400	500	33	3	2
11.5230	290	410	**300**	275	395	**245**	205	285	330	450	26,5	2	2
11.5530	680	480	**300**	665	465	**245**	580	335	725	525	77	4	2

NOTE
The small safes 11.5115/20/25 use flat vertical bolts not shaped bolt.

NO PROBLEM - With key and mechanical combination - Electronic combination

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Free standing models, available in the following versions:
Key and mechanical combination - Keypad electronic combination.
Manganese protection extended to protect front bolts. Motorised movement of MM shaped bolts (electronic version).
With no masonry work necessary for installation and with anchor points (supplied) for securing to both the wall and the floor, this series of safes offers a practical solution to all installation problems. The safe is encased entirely in three layers of steel.
Door thickness 10 mm; frame thickness 12 mm.
Key/Combination version supplied with: 2 keys 40 mm stem art. 92297/5 - 1 internal shelf.





Key and mechanical combination ①

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dimensions [mm]		Weight [Kg]	Locking bolts		
	height	width	**depth**	height	width	**depth**	height	width		horiz.	vert.	
11.KC 130	235	355	**230**	215	335	**165**	150	230	35	2	2	
11.KC 233	295	415	**285**	275	395	**210**	210	290	51	2	2	
11.KC 444	495	375	**325**	475	355	**260**	390	230	74	3	2	
Electronic ②												
11.KE 130	235	355	**230**	215	335	**165**	150	230	35	2	2	
11.KE 233	295	415	**285**	275	395	**210**	210	290	51	2	2	
11.KE 444	495	375	**325**	475	355	**260**	390	230	74	3	2	

NOTE
The small safes 11.KC130/KE130 use flat vertical bolts not shaped bolt.

UNDER - Key - Key and mechanical combination

SAFE CERTIFIED ACCORDING TO UNI EN 14450, CLASS S2, BY ICIM

Recessed floor model with key and key + mechanical combination locking. MM shaped bolts.
External manganese protection extended to protect front bolts (as shown in the photo).
Safe with top door for installation under floor level.
The opening side of this model has an external protection that offers easy levelling with any type of floor.
Door thickness 10 mm; frame thickness 12 mm.
Supplied with: 2 keys 40 mm stem art. 92297/5.
The safe is supplied closed.



Key ①

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dimensions [mm]		Weight [Kg]	Locking bolts		
	height	width	**depth**	height	width	**depth**	height	width		horiz.	vert.	
11.1131	265	385	**325**	230	350	**220**	150	230	24	2	2	
11.1231	325	445	**325**	290	410	**220**	210	290	31	2	2	

Key and mechanical combination ②

11.2131	265	385	**325**	230	350	**220**	150	230	24	2	2	
11.2231	325	445	**325**	290	410	**220**	210	290	31	2	2	
11.2331	395	495	**325**	360	460	**220**	280	340	40	2	2	

NOTE
The small safes 11.1131/2131 use flat vertical bolts not shaped bolt.

SPECIAL - Key

Built-in model in key version with Ø16 mm bolts.
Exterior finish in gloss midnight blue; single-piece weldless frame;
new hinges for increased door aperture angle.
Horizontal (art. 11.6311 - 11.6343) and vertical (art. 11.6372) layout. Door thickness 8 mm; frame thickness 8 mm.
Key version supplied with: 2 keys 40 mm stem art. 92293/5
Art. 11.6332-6342-6372 supplied with 1 internal shelf.
Non-removable and replaceable door.

Key	

Article	External frame dimensions [mm]			Internal frame dimensions [mm]			Door passage dim. [mm]		Rear dimensions [mm]		Weight [Kg]	Locking bolts		
	height	width	**depth**	height	width	**depth**	height	width	height	width		oriz.	vert.	
11.6311	170	265	**150**	145	235	**110**	100	175	195	280	7	2	-	
11.6312	170	265	**200**	145	235	**160**	100	175	195	280	7,5	2	-	
11.6322	200	290	**200**	175	265	**160**	100	175	215	300	9	2	-	
11.6332	240	330	**200**	215	305	**160**	140	230	255	340	11,5	2	-	
11.6342	290	390	**200**	265	365	**150**	190	290	305	400	14,5	2	-	
11.6343	290	390	**250**	265	365	**200**	190	290	305	400	15,5	2	-	
11.6372	330	240	**200**	305	215	**160**	225	135	340	260	11,5	3	-	

P3107

11.1120
11.2115
11.2120
11.2125
11.5115
11.5120
11.5125
11.3120
11.3125

Stand for 1 safe.
For the Personal series.

P3108

11.2420 - 11.2425

11.2440
11.2445 - 11.3445

11.2525
11.2530 - 11.5530

Stand for 3 safes.
For the Personal series, vertical models.

P3109

11.1120 - 11.2115 - 11.2120 - 11.2125
11.5115 - 11.5120 - 11.5125 - 11.3120
11.3125

11.1120 - 11.2115 - 11.2120 - 11.2125
11.5115 - 11.5120 - 11.5125 - 11.3120
11.3125

11.1220 - 11.1225 - 11.2220 - 11.2225
11.2230 - 11.5220 - 11.5225 - 11.5230
11.3220 - 11.3225

11.1220 - 11.1225 - 11.2220 - 11.2225
11.2230 - 11.5220 - 11.5225 - 11.5230
11.3220 - 11.3225

11.1320 - 11.2320 - 11.2325 - 11.2330
11.3320 - 11.3325 - 11.5325

Stand for 5 safes.
For the Personal series.

P3110

11.6311 - 11.6312

11.6322

11.6332

11.1120 - 11.2115 - 11.2120 - 11.2125
11.5115 - 11.5120 - 11.5125 - 11.3120
11.3125

11.1220 - 11.1225 - 11.2220 - 11.2225
11.2230 - 11.5220 - 11.5225 - 11.5230
11.3220 - 11.3225

11.1320 - 11.2320 - 11.2325 - 11.2330
11.3320 - 11.3325 - 11.5325

Stand for 6 safes.
For the Special, Personal series combined.

P3111/N

11.6372

11.6311 - 11.6312

11.6311 - 11.6312

11.6322

11.6332

11.6342 - 11.6343

Stand for 6 safes.
For the Special series.

P3114

11.KC 130 - 11.KE 130

11.KC 233 - 11.KE 233

11.KC 444 - 11.KE 444

Stand for 3 safes.
For the No Problem series.

P3117

11.3120 - 11.3125
11.3520 - 11.3525

11.3220 - 11.3225

11.3320 - 11.3325

11.3445

Stand for 4 safes.
For the Personal series.

P3118

11.1120 - 11.2115 - 11.2120 - 11.2125
11.3120 - 11.3125 - 11.5115 - 11.5120
11.5125

11.6342 - 11.6343

11.KC 130 - 11.KE 130

11.KC 130 - 11.KE 130
11.KC 233 - 11.KE 233

Stand for 4 safes.
For the Special, Personal, No Problem series.