

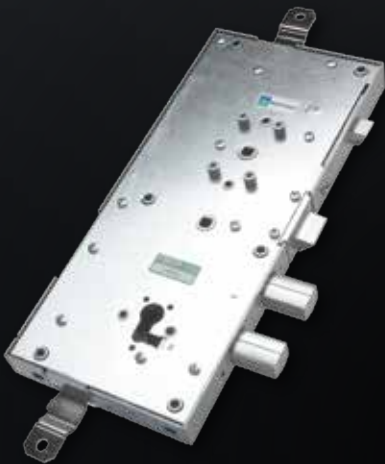


87

QUICK UNLOCKING AND REARMING LOCKS




ANTIPANIC AND
AUTOMATIC LOCKS



safeguarding your security


87.430T

MADE
IN
ITALY

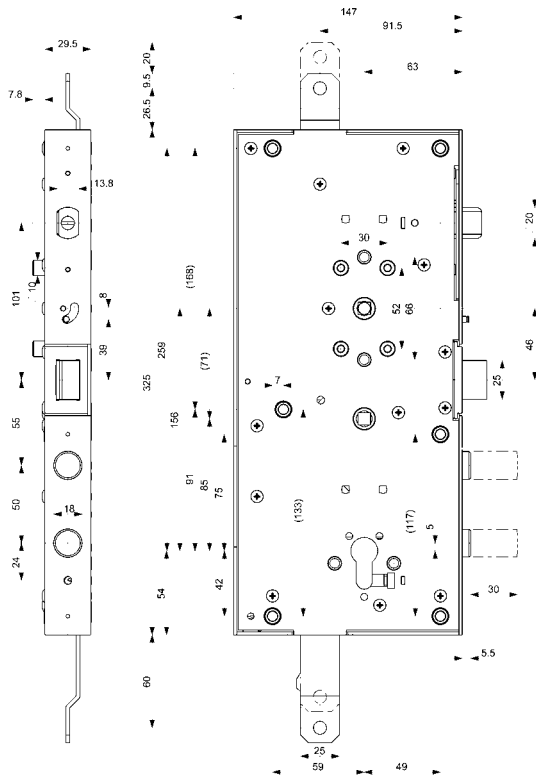

87.440A

MADE
IN
ITALY

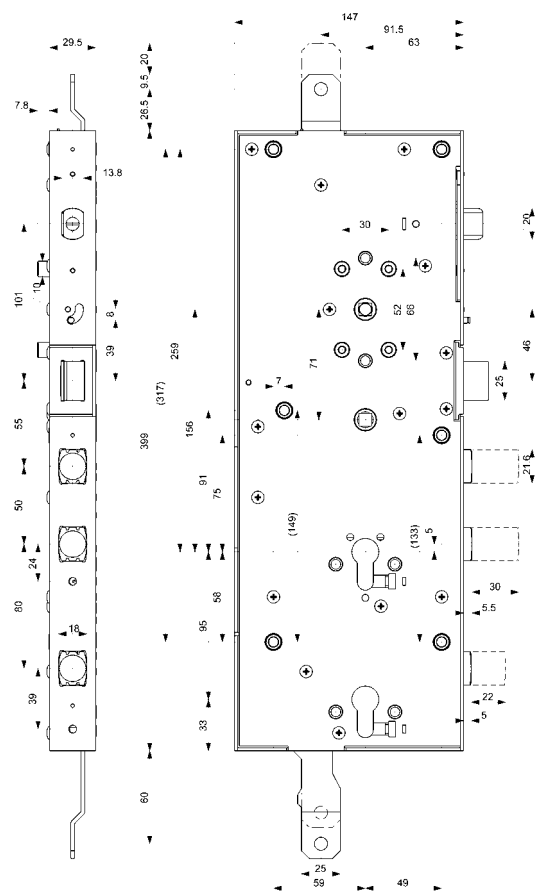

Characteristics

Locks for single and double cylinder.

- Three-points + Side (lower lock art. 87.440)
- Cylinder and handle backset 63 mm
- Latchbolt 25x15 activated by cylinder and handle
- Lever Ø20x14 with adjustable projection
- Round bolts Ø 18 mm (T version) or MM profile (A version)
- Bolts travel 29 mm - Centre distance 50 mm
- Bar travel 20 mm

Lower lock art. 87440. with:

- Round bolt Ø 18 mm (T version) or MM profile (A version)
- Bolt travel 22 mm
- All articles are supplied either left or right version (specify in the order)
- Cylinder fastening with "Mottura fitting" and with head screw.

N.B. The movement of the bars is UNIDIRECTIONAL (both upwards for locking). Be careful when ordering switchlocks to match the lock.

Possibility to fit a micro-switch (99641 D/S) to signal door locking.

The presence of a pressure on the lock
It guarantees the rapid closure of all the bolts
simply closing the door.

Possibility to exclude the Automatic locking function
through patented actuator pin.

Possibility to fit a double cylinder
(key opens the door from both sides) or half cylinders
(opening of the door from the outer side only + inside handle).

Possibility to fit an external handle that operates latch bolt only.



SUPPLIED

Security locks with
block lever on deadbolts



ON REQUEST

ROUND BOLT Ø18 mm



ON REQUEST




Cylinder extraction protection (T)




Q (B SUPPLIED + T












ON REQUEST






PATENTED "MM"
PROFILE BOLT

ROUND BOLT Ø18	T	A	MM PROFILE BOLT
	87.430T...B 87.430A...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
<p>Three-points for cylinder with AUTOMATIC LOCKING 25x15 latchbolt activated by cylinder and \square8 handle square. Reversible lever Ø20x14 with adjustable projection. Handle support. Cylinder fastening with "Mottura fitting" and with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p>			
			

ROUND BOLT Ø18	T	A	MM PROFILE BOLT
	87.440T...B 87.440A...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
<p>Three-points for double cylinder with AUTOMATIC LOCKING and upper lock blocking 25x15 latchbolt activated by cylinder and \square8 handle square. Reversible lever Ø20x14 with adjustable projection. Lower lock with lateral deadbolt and upper lock blocking. Handle support. Cylinder fastening with "Mottura fitting" and with head screw. Cylinders, reinforcements, handle and other accessories are NOT included. Independent locks.</p>			
			


<p>Note : locks are supplied with B version as standard. Bolts resistance to forcing exceeds 600 Nw required by applicable standards. Locks can be supplied Q version (B  +T ) on request.</p>	<p>Note : the burglar-proof device Q (B  +T ) MUST always be mounted on the outside side of the door; otherwise, it will NOT work. It is always necessary to specify the opening hand.</p>
--	---

Use SWITCHLOCKS (Order separately: see section 96)				
96.270/36/50	96.272	96.274/50/53	96.273	96.273/28/37
				
<p>Note: the use of different switchlocks from those reported, does not guarantee the proper functioning of the lock.</p>				

Use DEFENDER® (Order separately: see section 94)				WE RECOMMEND USING CHAMPIONS® SECURITY CYLINDERS 
TOP SYSTEM	LEVEL	BASIC	DF...	
				


87.377

MADE
IN
ITALY

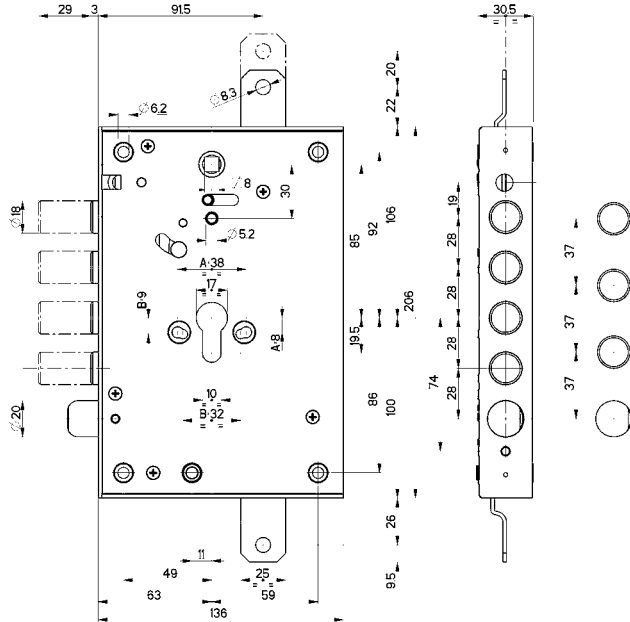

87.973 AD INFILARE

MADE
IN
ITALY

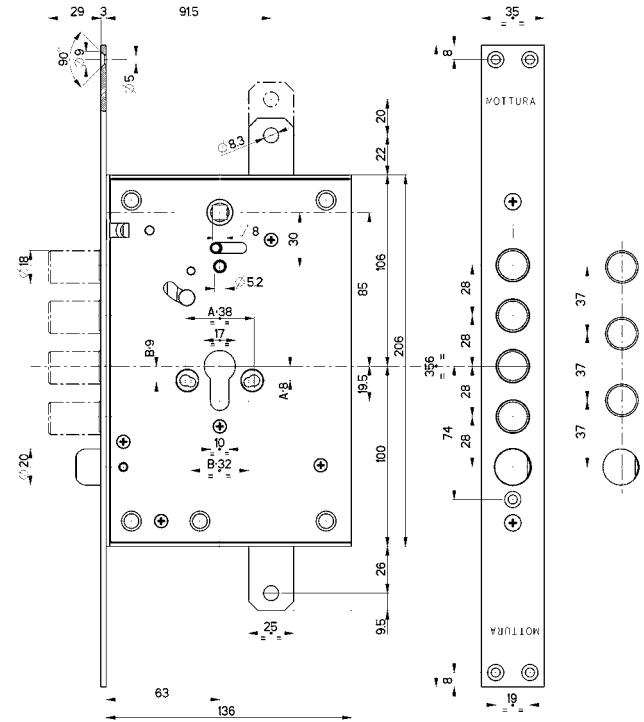

Characteristics

Variation in centre distance:/28 -/37

- Three-points
- Cylinder and handle backset 63 mm
- Round bolts \varnothing 18 mm with 29 mm travel
- Bar travel 20 mm
- All articles are supplied either left or right version (specify in the order)

Depending on the version,
the quick unlock (release) inside only,
and the **quick locking** (rearm) on both sides of the door are possible.

87.373 / 87.973 Quick unlocking

of all lock points from internal side handle only. Locking from the internal side and locking and unlocking from the external side are only possible with the europrofile cylinder mechanism.

87.374 / 87.974 - Quick unlocking

of all lock points from internal side handle only. **Quick locking** of all lock points by handle from both internal sides. Unlocking from internal and external sides only possible with the europrofile cylinder mechanism.

87.375 / 87.975 - Quick locking (rearm)

of all lock points from handle from both internal and external sides. Unlocking from internal and external sides only possible with the europrofile cylinder mechanism.

87.376 / 87.976 - Quick unlocking and quick locking (rearm)

of all lock points from handle from internal side handle only. **Quick locking (rearm)** from external side. Unlocking from external side only possible with the europrofile cylinder mechanism.

87.377 / 87.977 - Quick unlocking and quick locking (rearm)

of all lock points from handle from internal side handle only. **Quick locking (rearm)** from external side. Unlocking from external side only possible with the europrofile cylinder mechanism.

Quick unlock function on internal side may be enabled or disabled with the selector pin.



SUPPLIED

Security locks with
block lever on deadbolts



ON REQUEST

Cylinder extraction protection (T)




Q (B SUPPLIED + T



ON REQUEST

Security locks with block lever
on deadbolts and certification






RIM LOCK			MORTISE-TYPE
	87.373...B 87.973...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
	<p>Three-points with latchbolt for cylinder quick UNLOCK (INSIDE ONLY) Ø20 mm latchbolt operated by cylinder and \sphericalangle8 handle square. Reversible latchbolt. Cylinder fastening with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p> 		
	87.374...B 87.974...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
	<p>Three-points with latchbolt for cylinder quick UNLOCK AND REARM (INSIDE ONLY) Ø20 mm latchbolt operated by cylinder and \sphericalangle8 handle square. Reversible latchbolt. Cylinder fastening with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p> 		
	87.375...B 87.975...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
	<p>Three-points with latchbolt for cylinder quick REARM (INSIDE and OUTSIDE) Ø20 mm latchbolt operated by cylinder and \sphericalangle8 handle square. Reversible latchbolt. Cylinder fastening with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p> 		
	87.376...B 87.976...B		
	..B Block lever on bolts		
	..Q Reinforcement on the bolts + Burglar-proof (B+T)		
	<p>Three-point with latchbolt for cylinder Quick UNLOCK AND REARM (INSIDE) quick REARM (OUTSIDE) WITHOUT actuator pin. Ø20 mm latchbolt operated by cylinder and \sphericalangle8 handle square. Reversible latchbolt. Cylinder fastening with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p> 		

RIM LOCK				MORTISE-TYPE
	87.377...B		87.977...B	
	..B Block lever on bolts			
	..Q Reinforcement on the bolts + Burglar-proof (B+T)			
	<p>Three-points with latchbolt for cylinder Quick UNLOCK AND REARM (INSIDE) quick REARM (OUTSIDE) WITH actuator pin. Ø20 mm latchbolt operated by cylinder and ∇8 handle square. Reversible latchbolt. Cylinder fastening with head screw. Cylinders, reinforcements, handle and other accessories are NOT included.</p> <div style="text-align: center;">  </div>			
				

Note : Locks are supplied as the **B** version as standard.
 Bolts resistance to forcing exceeds 600 Nw required by applicable standards. The locks can be supplied **Q (B+T)** version, on request.

Note : the burglar-proof device **Q (B+T)** **MUST** always be mounted on the outside side of the door; otherwise, it will **NOT** work.
 It is always necessary to specify the opening hand.

Note : On request **B** or **Q (B+T)** locks version can be supplied with certification according to standard UNI EN 12209 and CE mark. In the order, please add **U** to the article code of the lock.
 Certification is valid only if the lock is protected by a manganese plate of the same dimensions of the lock or larger.

Use DEFENDER® (Order separately: see section 94)				WE RECOMMEND USING CHAMPIONS® SECURITY CYLINDERS
TOP SYSTEM	LEVEL	BASIC	DF...	
				

87.397

MADE IN ITALY


Characteristics

Special HOOK bolt

- Three-points
- **Cylinder and handle backset 73 mm**
- Bolt with 29 mm travel
- Bar travel 20 mm

The locks are **supplied** with:

- block lever on bolts **B**
- burglar-proof device (cylinder extraction) **T**

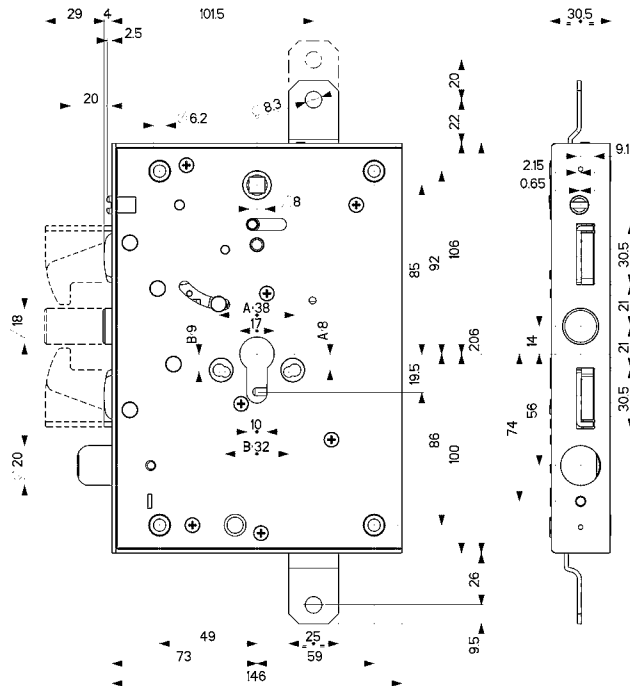


RIM LOCK

87.397...Q

..Q Reinforcement on the bolts + Burglar-proof (B+T)

Three-points with latchbolt for cylinder
Quick UNLOCK AND REARM (INSIDE) quick REARM (OUTSIDE)
WITH actuator pin.
 Ø20 mm latchbolt operated by cylinder and \square 8 handle square.
Reversible latchbolt. Cylinder fastening with head screw.
 Cylinders, reinforcements, handle and other accessories are **NOT** included.



96.371



Use **SWITCHLOCK**
 (Order separately:
 see section 96)

Use **DEFENDER®** (Order separately: see section 94)

TOP SYSTEM



LEVEL



BASIC




DF...



WE RECOMMEND
 USING CHAMPIONS®
 SECURITY CYLINDERS



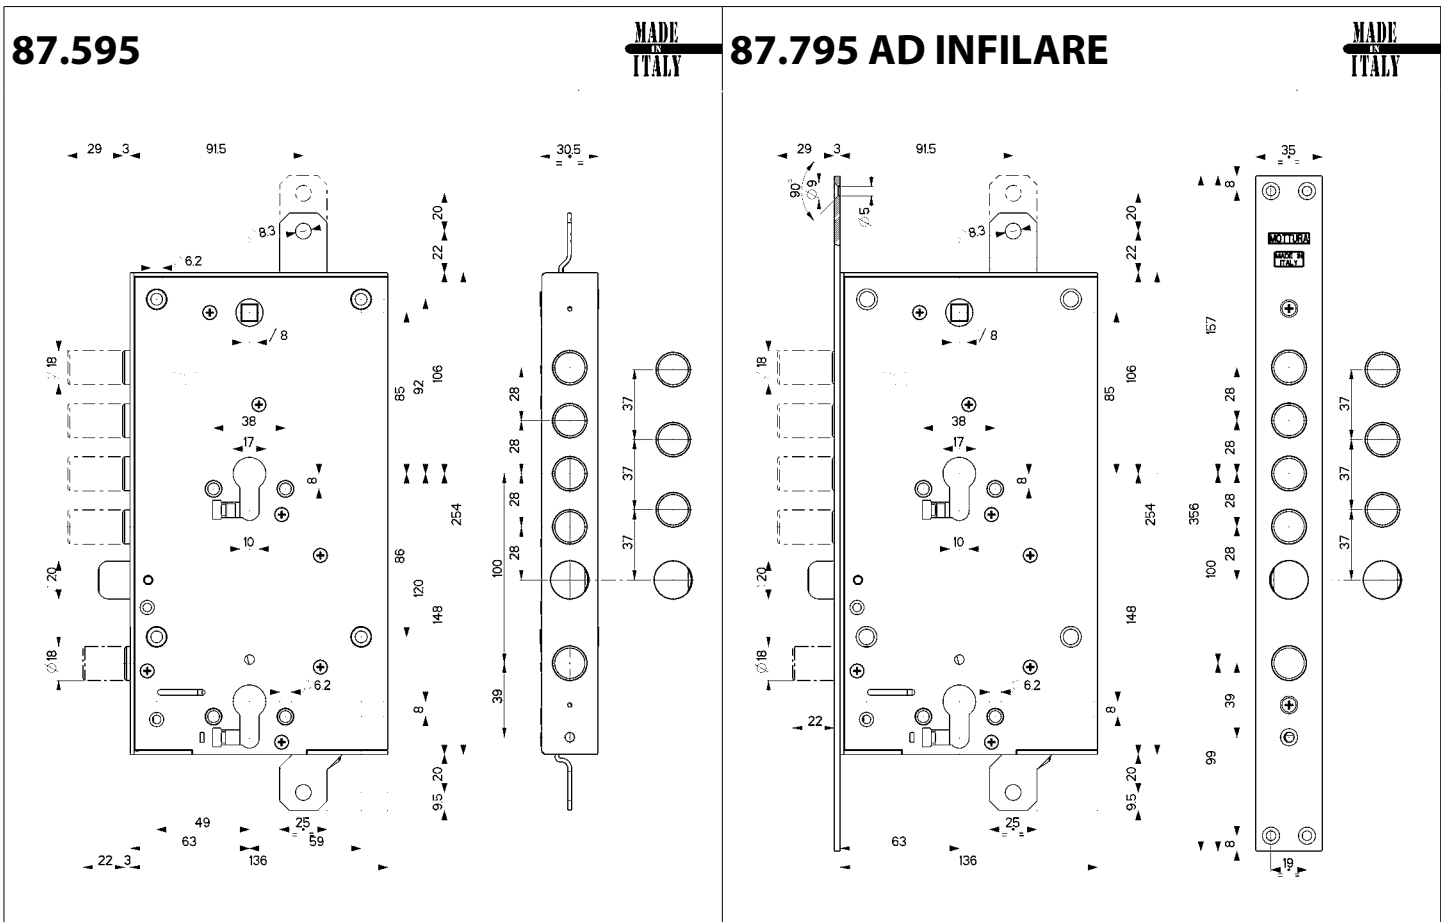

RIM LOCK		MORTISE-TYPE						
	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%; text-align: center;">87.595...B</td> <td style="width:50%; text-align: center;">87.795...B</td> </tr> <tr> <td colspan="2" style="text-align: center;">..B Block lever on bolts</td> </tr> <tr> <td colspan="2" style="text-align: center;">..Q Reinforcement on the bolts + Burglar-proof (B+T)</td> </tr> </table>	87.595...B	87.795...B	..B Block lever on bolts		..Q Reinforcement on the bolts + Burglar-proof (B+T)		
87.595...B	87.795...B							
..B Block lever on bolts								
..Q Reinforcement on the bolts + Burglar-proof (B+T)								
<p>Three-points for double cylinder Quick unlock (RELEASE) of all upper turn lock with handle, from internal side only. Variation in centre distance:/28 -/37 Ø20 mm latchbolt operated by cylinder and 8 handle square. Reversible latchbolt. Cylinder and handle backset 63 mm Ø 18 mm bolts with 29 mm travel Bar travel 20 mm. Lower lock with side locking and upper lock blocking Ø 18 bolt with 22 mm travel. The article is supplied left or right-hand (specify in the order). Cylinders, reinforcements, handle and other accessories are NOT included. Dependent locks with upper lock blocking. Activate A first, then proceed with B.</p>								

FOR ACCESSORIES AND SPARE PARTS SERIES 87 REFER TO

	93	
	94	
	96	